



- Features

1. Magnetically shielded construction – Low EMI
2. Excellent Power Density
3. Engineered to Provide High Efficiency

## ELECTRICAL CHARACTERISTICS



Part Number	Inductance (uH) (1)	Test Frequency	DC Resistance (Ω MAX) (2)	Saturation Current (3) (A)	Temperature Current (4) (A)
SC3DM-101	100	100KHZ	0.65	0.032	0.80
SC3DM-151	150	100KHZ	0.80	0.028	0.68
SC3DM-221	220	100KHZ	1.10	0.022	0.60
SC3DM-331	330	100KHZ	1.30	0.016	0.50
SC3DM-471	470	100KHZ	1.90	0.014	0.42
SC3DM-681	680	100KHZ	2.50	0.011	0.35
SC3DM-102	1000	100KHZ	3.40	0.009	0.27
SC3DM-152	1500	100KHZ	6.00	0.008	0.22
SC3DM-222	2200	100KHZ	9.20	0.007	0.17
SC3DM-332	3300	100KHZ	11.5	0.005	0.14
SC3DM-472	4700	100KHZ	18.1	0.004	0.12

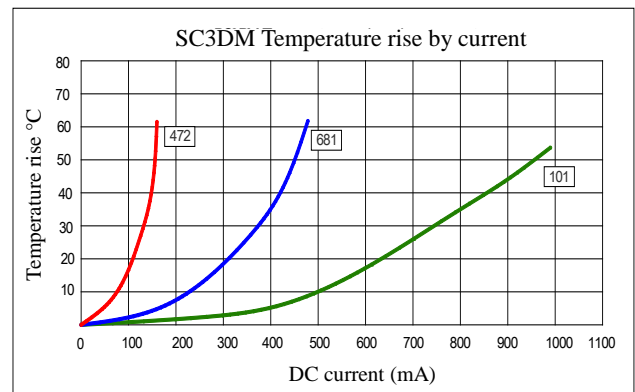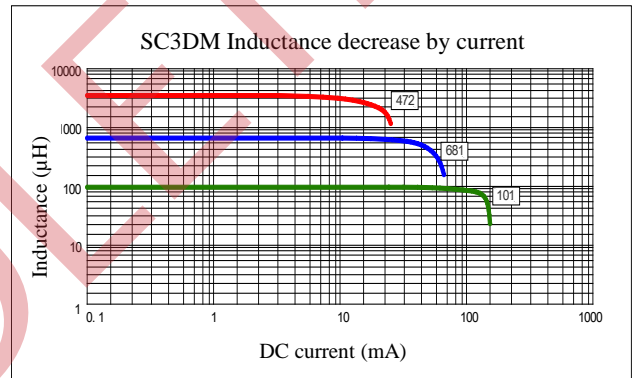

- (1). Inductance tolerance  $\pm 30\%$  tested at 0.25V, 0ADC and 25°C.
- (2). DCR measured at 25°C.
- (3). The DC current at which the inductance decreases by 10% from its initial value.
- (4). The DC current that results in a 40°C temperature rise from 25°C ambient.

[Click here for QUANTITY PER REEL & PACKING INFORMATION](#)

Custom versions available upon request.