

THE INFORMATION CONTAINED HEREIN IS CONSIDERED "PROPRIETARY" TO BEL FUSE INC. AND SHALL NOT BE COPIED, REPRODUCED OR DISCLOSED WITHOUT THE WRITTEN APPROVAL OF BEL FUSE INC.

RoHS



ELECTRICAL CHARACTERISTICS @ 25°C

1.0 INDUCTANCE:

(P2-P3) : 350uH MIN. @ 0.1V, 100KHz, 8mA DC BIAS
 (P4-P5) : 350uH MIN. @ 0.1V, 100KHz, 8mA DC BIAS
 (P7-P8) : 350uH MIN. @ 0.1V, 100KHz, 8mA DC BIAS
 (P9-P10) : 350uH MIN. @ 0.1V, 100KHz, 8mA DC BIAS

2.0 TURNS RATIO:

(P2-P3):(J1-J2) : 1CT : 1CT ± 2%
 (P4-P5):(J3-J6) : 1CT : 1CT ± 2%
 (P7-P8):(J4-J5) : 1CT : 1CT ± 2%
 (P9-P10):(J7-J8) : 1CT : 1CT ± 2%

3.0 RETURN LOSS: 100 OHM REF.

500kHz TO 40MHz : -18dB MIN.
 40MHz TO 100MHz : -12+20LOG(f/80MHz) MIN.

4.0 INSERTION LOSS: RS=RL=100 OHMS

100kHz TO 100MHz : -1.2dB MAX.

5.0 CROSS TALK: Ch1-Ch2, Ch1-Ch3, Ch1-Ch4, Ch2-Ch3, Ch2-Ch4, Ch3-Ch4

1MHz TO 30MHz : -35dB MIN.
 30MHz TO 80MHz : -24dB MIN.
 80MHz TO 100MHz : -25dB MIN.

6.0 CM TO CM REJECTION:

100kHz TO 100MHz : -30dB MIN.

7.0 CM TO DM REJECTION:

100kHz TO 100MHz : -35dB MIN.


8.0 VOLTAGE WITHSTAND:

(J1,J2) TO (P2,P3) : 1500Vrms
 (J3,J6) TO (P4,P5) : 1500Vrms
 (J4,J5) TO (P7,P8) : 1500Vrms
 (J7,J8) TO (P9,P10) : 1500Vrms

9.0 THIS COMPONENT IS A PATENT PRODUCT;US PATENT NUMBER 7,123,117.

10.0 OPERATING TEMPERATURE:

0°C TO 70°C

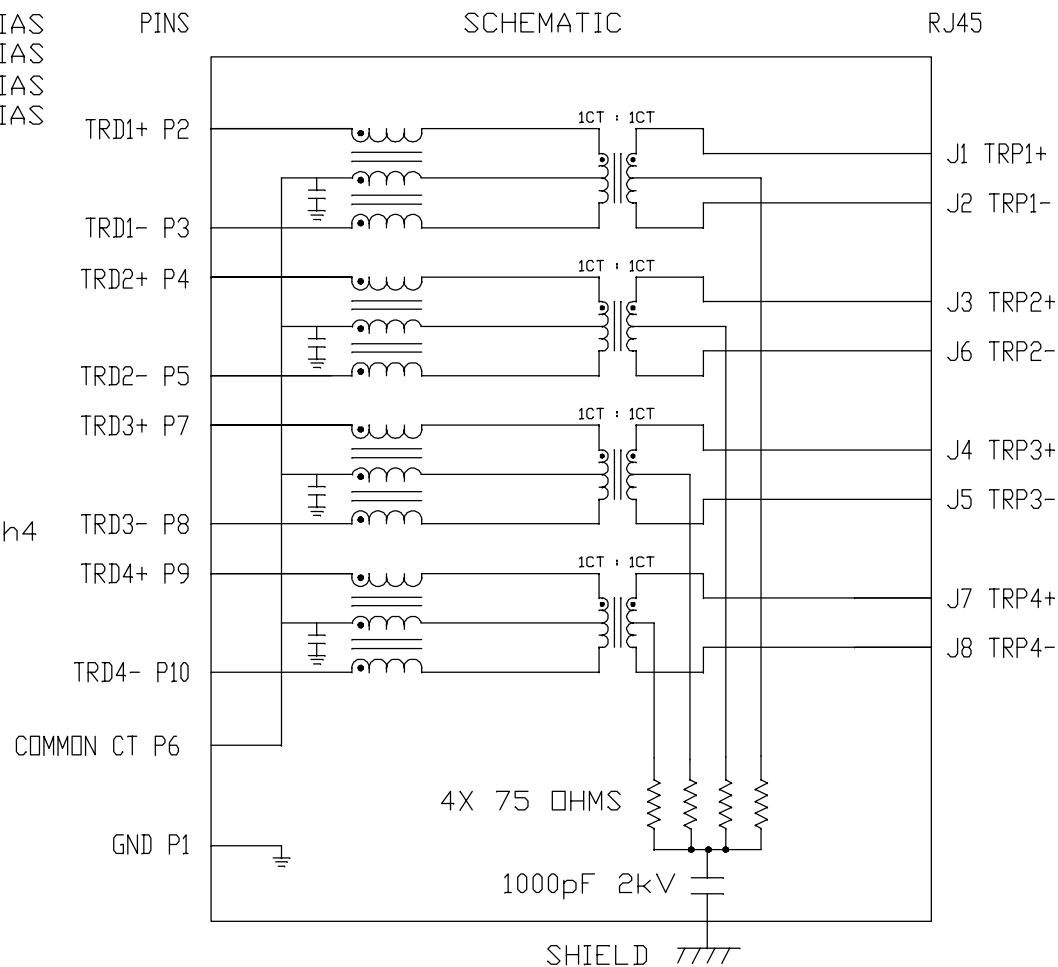


REV. : B PAGE : 2

<p>ORIGINATED BY CHOW WANCHUNG DATE 2019-04-22</p>	<p>TITLE MagJack® 10/100/1000 BT TAB UP, SHIELDED PATENTED</p>	<p>PART NO. / DRAWING NO. SI-51005-FB</p>	<p>STANDARD DIM. [] METRIC DIM. TOL. IN INCH AS REF.</p>	
<p>DRAWN BY XIE YIMING DATE 2019-04-22</p>	<p>FILE NAME SI-51005-FB_B.DWG</p>	<p>.X UNIT : INCH [mm] .XX SCALE : N/A .XXX SIZE : A4</p>		



THE INFORMATION CONTAINED HEREIN IS CONSIDERED "PROPRIETARY" TO BEL FUSE INC. AND SHALL NOT BE COPIED, REPRODUCED OR DISCLOSED WITHOUT THE WRITTEN APPROVAL OF BEL FUSE INC.


RoHS

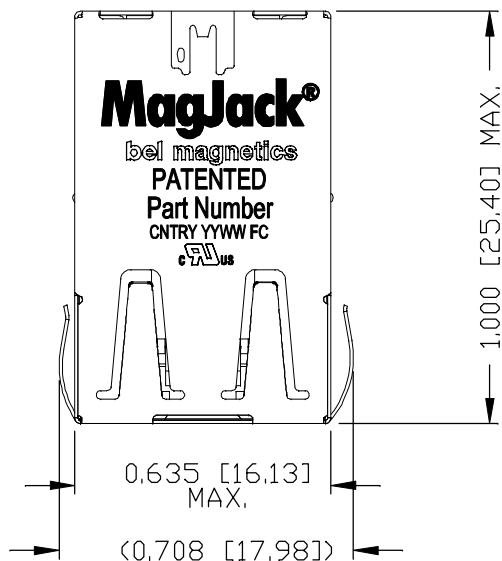

NOTES:

- CONNECTOR MATERIALS:
HOUSING: THERMOPLASTIC UL94 V-0
CONTACT/SHIELD: COPPER ALLOY
SHIELD PLATING: NICKEL OR TIN
CONTACT PLATING: 50 MICRO-INCH SELECTIVE HARD GOLD PLATING OR EQUIVALENT IN CONTACT AREA
- PIN NOT ELECTRICALLY CONNECTED MAYBE OMITTED. SEE ELECTRICAL DRAWING FOR OMITTED PINS.
- TOLERANCES COMPLY WITH F.C.C. DIMENSION REQUIREMENTS.
- THE PRODUCT IS RoHS COMPLIANT.
cULus UL RECOGNIZED - FILE #E474585.
- THE PART IS RECOMMENDED FOR WAVE SOLDERING. THE SUGGESTED PEAK WAVE SOLDERING CONDITION IS 260°C MAX. AND 10 SECONDS MAX.

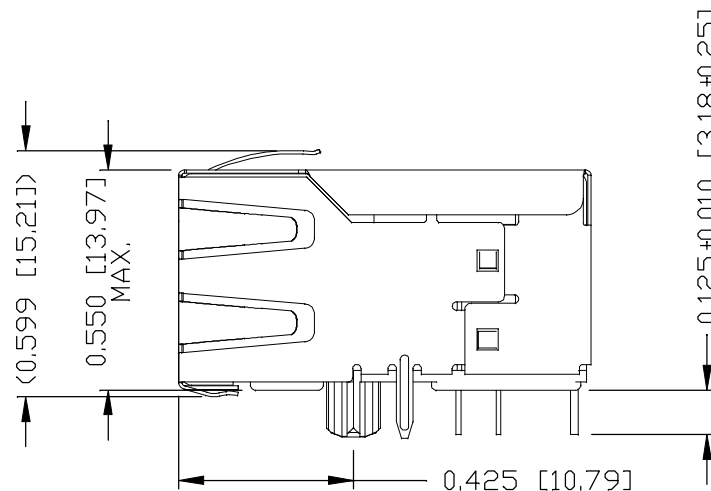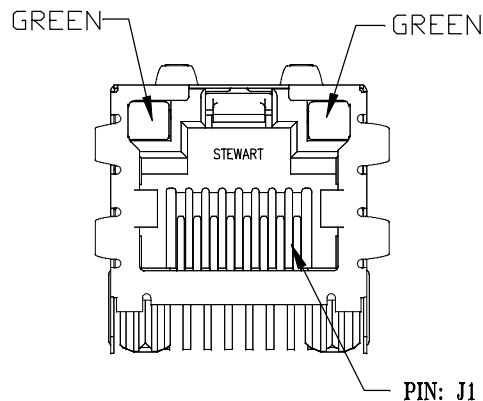

REV. :	B	PAGE :	3
		UNIT : INCH [mm]	
		SCALE : N/A	
		SIZE : A4	

ORIGINATED BY SANDY LIN
DATE 2019-04-22
DRAWN BY RUAN WENJUN
DATE 2019-04-22

TITLE	MagJack®
	10/100/1000 BT
	TAB UP, SHIELDED
	PATENTED

PART NO. / DRAWING NO.	SI-51005-FB
FILE NAME	SI-51005-FB_B.DWG


STANDARD DIM. TOL. IN INCH	[] METRIC DIM. AS REF.
.X	
.XX	
.XXX	±0.005

THE INFORMATION CONTAINED HEREIN IS CONSIDERED 'PROPRIETARY' TO BEL FUSE INC. AND SHALL NOT BE COPIED, REPRODUCED OR DISCLOSED WITHOUT THE WRITTEN APPROVAL OF BEL FUSE INC.



LED SPECIFICATION			
STANDARD LED	WAVELENGTH	FORWARD V (MAX)	* (TYP)
GREEN	565 nm	2.5 V	2.2 V

*WITH A FORWARD CURRENT OF 20 mA (TYP)

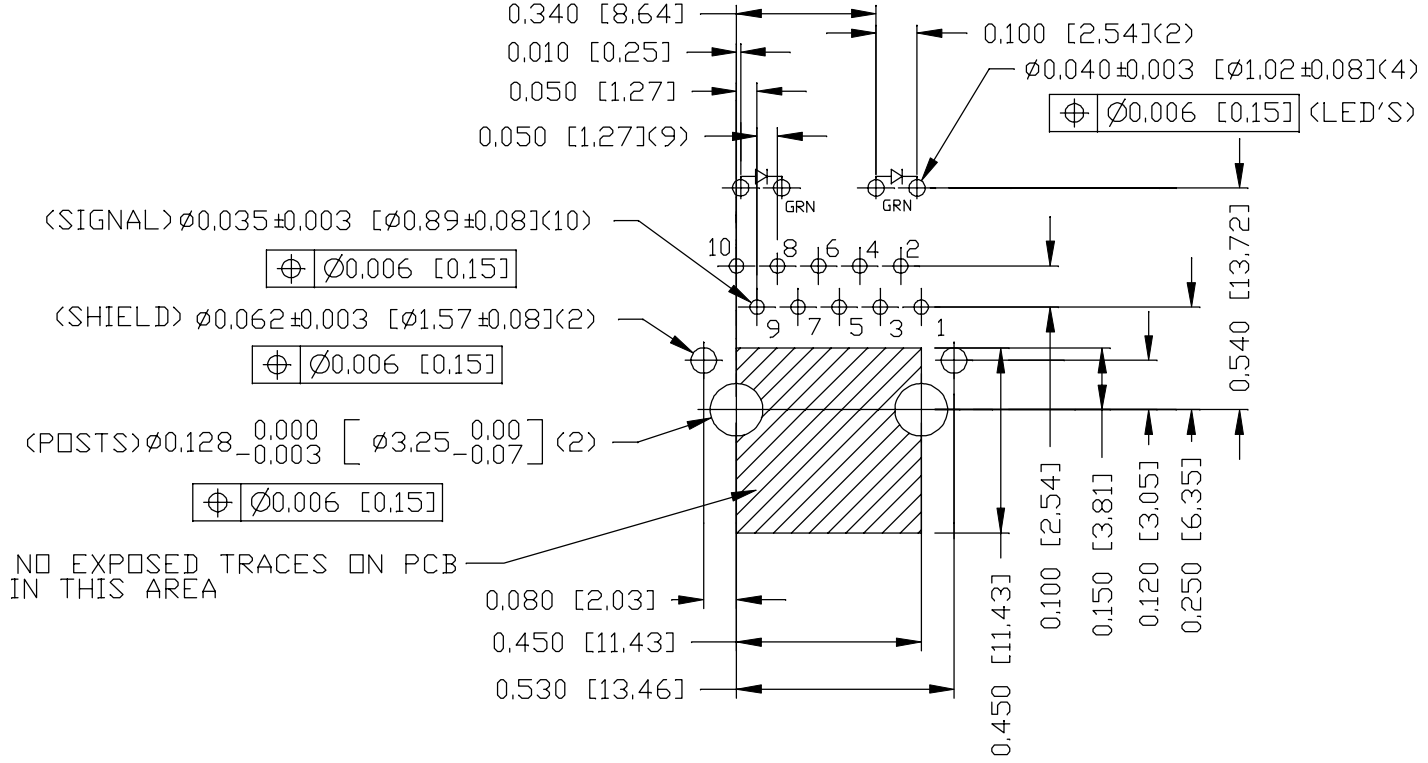

NO EXPOSED TRACES ON PCB IN THIS AREA

P.C.B. RECOMMENDED HOLE LAYOUT SEEN FROM COMPONENT SIDE

ALL CENTERLINE DIMENSIONS ARE BASIC.

REV. : B PAGE : 4

ORIGINATED BY
SANDY LIN
DATE 2019-04-22
DRAWN BY
RUAN WENJUN
DATE 2019-04-22

TITLE
MagJack®
10/100/1000 BT
TAB UP, SHIELDED
PATENTED


PART NO. / DRAWING NO.
SI-51005-FB
FILE NAME
SI-51005-FB_B.DWG

STANDARD DIM. TOL. IN INCH	[] METRIC DIM. AS REF.
.X	UNIT : INCH [mm]
.XX	SCALE : N/A
.XXX	±0.005
	SIZE : A4



THE INFORMATION CONTAINED HEREIN IS CONSIDERED "PROPRIETARY" TO BEL FUSE INC. AND SHALL NOT BE COPIED, REPRODUCED OR DISCLOSED WITHOUT THE WRITTEN APPROVAL OF BEL FUSE INC.

RoHS

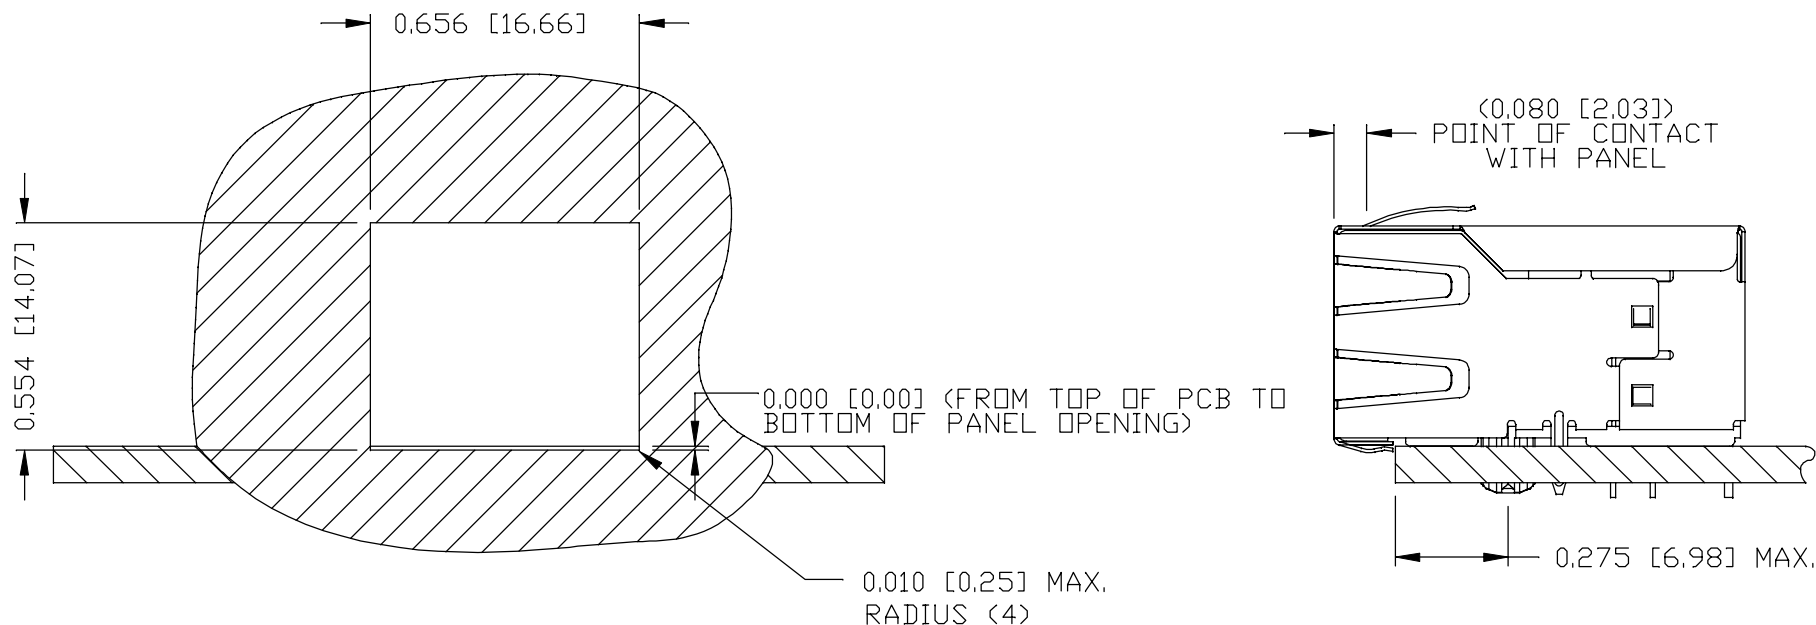

SUGGESTED PANEL OPENING

NOTES:

THE SUGGESTED PANEL OPENING IS INTENDED TO GIVE THE USER THE ABILITY TO HAVE REASONABLE JACK / PANEL CLEARANCES YET MAINTAIN RELIABLE GROUNDING CAPABILITY.

REV. : B PAGE : 5

ORIGINATED BY
SANDY LIN
DATE 2019-04-22
DRAWN BY
RUAN WENJUN
DATE 2019-04-22

TITLE
MagJack®
10/100/1000 BT
TAB UP, SHIELDED
PATENTED

PART NO. / DRAWING NO.
SI-51005-FB
FILE NAME
SI-51005-FB_B.DWG

STANDARD DIM. TOL. IN INCH	[] METRIC DIM. AS REF.
.X	UNIT : INCH [mm]
.XX	SCALE : N/A
.XXX ±0.005	SIZE : A4

